


Modbus Siemens Universal Gateway

Model: JMSGW

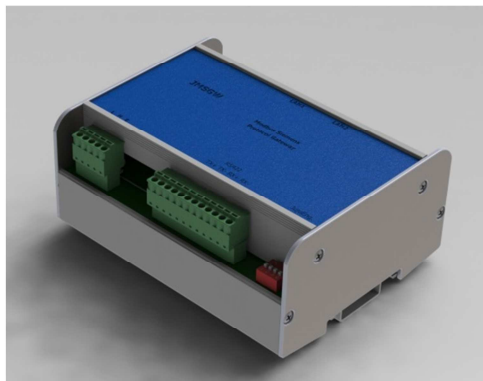


주주엔지니어링

Descriptions

JMSGW은 Modbus 프로토콜 사용 기기와 Siemens 프로토콜 사용 기기 사이의 통신을 연결하는 Universal Gateway이다. 일반 산업 현장에서 가장 많이 사용되는 산업용 프로토콜인 Modbus 와 Siemens 상호간의 통신이 가능하도록 설계된 매우 보편적인 Gateway이므로 다양한 응용이 가능하다. Modbus 프로토콜은 Serial Communication을 기반의 RTU Mode의 Master와 Slave를 모두 지원하며, Ethernet Network 기반의 TCP/IP Mode인 client, server를 지원한다. Siemens 프로토콜은 Ethernet Network 기반의 TCP/IP Mode인 Client, Server 뿐만 아니라 Active Partner, Passive Partner를 지원한다. Special User Protocol은 사용자가 원하는 임의의 프로토콜을 옵션으로 지원한다. JMSGW는 위 구성 사항 중 어떤 조합이라도 모두 통신 가능한 Universal Gateway이다.

System Specifications

- Network: TCP/IP RJ45 2 Ports
- Serial Port: RS422 1 Port
- DIP S/W for Mode Setting: 4x2
- Power Supply: AC110/220V, 60Hz
- Dimension: 135(W) X 105(H) X 60(D)

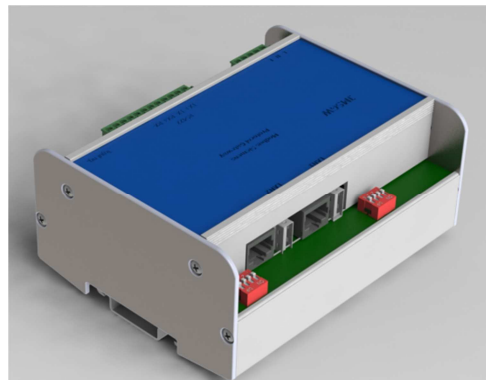

Ordering Information

JMSGW/ LAN1/ LAN2/ RS422 Base code
 /LAN1:MS for Modbus TCP/IP Server
 MC for Modbus TCP/IP Client
 SS for Siemens S7 Server
 SC for Siemens S7 Client
 SA for Siemens Active Partner
 SP for Siemens Passive Partner
 User for Special User Protocol
 None
 /LAN2: same as LAN1
 /RS422A:MM for Modbus Serial Master
 MS for Modbus Serial Slave
 None

For Example:

JMSGW/ SS/None/MM
 for Gateway between Siemens S7 Server and Modbus Serial Master.

JMSGW/ SS/MC/None
 for Gateway between Siemens S7 Server and Modbus TCP/IP Client.

주주엔지니어링

<http://www.jujueng.co.kr>

전남 광양시 광영동 새미골길 10

전화: 061) 794-1136

팩스: 061) 794-1135

전자 메일: mail@jujueng.co.kr